

05/28/99

PATENT APPLICATION TRANSMITTAL LETTER
(Large Entity)Docket No.
INTL-0208-US (P7014)TO THE ASSISTANT COMMISSIONER FOR PATENTS

Transmitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

Wayne J. Carr

For: **Communicating Ancillary Information Associated with a Plurality of Audio/Video Programs**

Enclosed are:

- ☒ Certificate of Mailing with Express Mail Mailing Label No. **EL360179300US**
- ☒ 8 sheets of drawings.
- ☐ A certified copy of a _____ application.
- ☒ Declaration ☒ Signed. ☐ Unsigned.
- ☒ Power of Attorney
- ☐ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☒ Other: **Recordation Form Cover Sheet and Assignment**

jc511 U.S. PTO
09/321939
05/28/99**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	23	- 20 =	3	x \$18.00	\$54.00
Indep. Claims	7	- 3 =	4	x \$78.00	\$312.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
TOTAL FILING FEE					\$1,126.00

- ☒ A check in the amount of **\$1,126.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **20-1504** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: **May 28, 1999**

Signature

Dan C. Hu, Reg. No. 40,025
Trop, Pruner, Hu & Miles, P.C.
8554 Katy Freeway, Suite 100
Houston, TX 77024
(713) 468-8880 [Ph]
(713) 468-8883 [Fax]

CC:

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: COMMUNICATING ANCILLARY
INFORMATION ASSOCIATED WITH A
PLURALITY OF AUDIO/VIDEO
PROGRAMS

APPLICANT: Wayne J. Carr

Express Mail No.: EL360179300
Date: May 28, 1999

668250-667260

COMMUNICATING ANCILLARY INFORMATION ASSOCIATED WITH A
PLURALITY OF AUDIO/VIDEO PROGRAMS

BACKGROUND

The invention relates to communicating ancillary information associated with a plurality of audio/video programs, such as television content associated with a plurality of channels.

5 Ancillary information, such as program sub-titles, emergency messages, closed caption messages, and program guide information, may be transmitted with regular television content. More recently, other types of ancillary information that may be sent with television content include enhancement data such as web pages, multimedia information, or other digital data files. Ancillary information may be sent in the vertical
10 blanking interval (VBI) of an analog television broadcast signal. Alternatively, the ancillary information may be sent with digital television content over a digital transport medium.

Various standards exist that provide for transmission of ancillary information with television content. One standard is the Advanced Television Enhancement Forum
15 (ATVEF) Specification, Draft Version 1.1r26, dated February 2, 1999. The ATVEF Specification is designed to provide for transmission of enhancement data along with television content in both analog and digital systems, such as cable systems, satellite systems, terrestrial systems, and so forth. The combination of the enhancement data and the television content may be referred to as enhanced television content. Enhanced
20 television content provides more information and options to viewers. For example, a viewer may be presented with the option of viewing advertisements, educational information, and so forth, while watching regular television programming.

Transmission of enhanced television content, however, may increase bandwidth requirements of the transport medium between the transmission source and receiving
25 sites. Thus, a need exists to provide for solutions that address bandwidth limitations of transport media as well as provide for greater flexibility in the transmission of such ancillary information.

SUMMARY

In general, according to one embodiment, a method of communicating audio/video programs includes receiving the audio/video programs over a transport medium. A plurality of ancillary information streams associated with a plurality of audio/video programs are received. One of the audio/video programs is tuned to, with one or more of the ancillary information streams identified as associated with the tuned audio/video program.

Other features and embodiments will become apparent from the following description and from the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1A and 1B are block diagrams of embodiments of information delivery systems.

Fig. 2 is a block diagram of a transport operator system, receiving system, and server according to one embodiment in the information delivery systems of Figs. 1A and 1B.

Figs. 3A, 3B, 4, and 5 illustrate transmission and receipt of audio and video content and associated ancillary information according to an embodiment.

Fig. 6 is a flow diagram of a transport routine according to one embodiment.

Fig. 7 is a flow diagram of a routine or routines adapted to receive ancillary information according to one embodiment.

DETAILED DESCRIPTION

In the following description, numerous details are set forth to provide an understanding of the present invention. However, it is to be understood by those skilled in the art that the present invention may be practiced without these details and that numerous variations or modifications from the described embodiments may be possible. For example, although reference is made to the Advanced Television Enhancement Forum (ATVEF) Specification, Draft Version 1.1 r26, dated February 2, 1999, it is contemplated that other versions of the ATVEF Specification as well as other standards

and techniques for transmission of ancillary information with content that includes audio data or video data (e.g., television content) may be included in further embodiments.

Referring to Figure 1A, an information delivery system 10 according to one embodiment includes a content creator 12, a transport operator system 14, and a plurality of receivers 16. The receivers 16 may be located at various receiving sites, including homes, offices, entertainment facilities, or other locations. The content creator 12 originates enhancement data (or other type of ancillary information) and television content (or other type of content including audio and/or video data) to be transmitted by the transport operator system 14. Alternatively, the content creator 24 may create enhancement data with television content provided by another source to the transport operator system 14. Enhancement data may include graphics (e.g., web pages, multimedia information, or other digital data files), presentation layout, and synchronization information. The combination of the enhancement data and television content is referred to as enhanced television content.

The transport operator system 14 provides an enhanced television content delivery infrastructure that may include terrestrial, cable, satellite, or other types of transmission facilities (either analog or digital). The television content and enhancement data may be transmitted over a transport medium 22 which may be a terrestrial, cable, satellite, or other type of link, to the receivers 16. The receivers 16 may include televisions, set-top boxes, personal computers, or other types of systems adapted to receive television content and associated enhancement data.

As used in this description, the term audio/video (A/V) content is intended to include any type of audio and/or video data that may be transmitted or distributed to one or more receiving sites for presentation to viewers and/or listeners. As used here, A/V content may refer to content that may include both an audio and a video portion or one of an audio or video portion. Further, ancillary information other than enhancement data may be transmitted with the A/V content. For example, ancillary information may include program sub-titles, emergency messages, closed caption messages, and program guide information.

The receivers 16 may further be coupled to a secondary link 20 which may be a data delivery communications channel such as the Internet, a DOCSIS network (which is

an interface for cable modems), or other communications link (whether uni-directional or bi-directional). DOCSIS stands for Data Over Cable Systems Interface Specifications, and is described in DOCSIS, Version 1.0, dated March 1998, as provided by the International Telecommunication Union (ITU). The secondary link 20 may be coupled to the transport operator system 14 and/or to one or more servers 18. According to some embodiments, portions of enhancement data associated with the A/V content transmitted over the transport medium 22 may be communicated over the secondary link 20 from the transport operator system 14, the one or more servers 18, or some combination of such systems.

In an alternate embodiment, another type of secondary data path can be part of the A/V transmission itself, but not tightly tied to a particular A/V channel. For instance, in MPEG-2 based systems like ATSC (Advanced Television Systems Committee) or DVB (Digital Video Broadcasting), transport stream programs correspond to what is commonly thought of as TV channels. MPEG stands for Moving Picture Experts Group, and the MPEG-2 standard is described in ISO/IEC 13818-1 (MPEG-2 Systems), ISO/IEC 13818-2 (MPEG-2 Video) and ISO/IEC 13818-3 (MPEG-2 Audio), dated in 1994 and provided by the International Organization for Standardization (ISO) and the International Electrotechnical Commission (IEC). A description of ATSC may be found in "Guide to the Use of the ATSC Digital Television Standard," dated October 1995.

DVB standards may be available from the web site {<http://www.etsi.org>}.

These transport stream programs can contain audio, video and data (e.g., ancillary information), with all of them tightly associated with that single transport stream program. When a user tunes to the transport stream program, the receiving device knows the audio, video, and data that are associated because they are marked as all being part of the same program. In addition, other transport stream programs can be created that contain no audio or video, only data. In this case, ancillary information associated with a plurality of audio/video programs could be carried in a single data-only transport stream program. This creates the same situation as if that ancillary data was carried outside the transport that carries the audio/video program. Data that is intended to be associated with a particular audio/video program is transported separate from it and instead may be multiplexed onto a single delivery mechanism (e.g., a data-only transport stream

program) that carries ancillary information for many audio/video programs. The problem then becomes being able to re-associate ancillary information with the proper audio/video program at the receiving end.

One standard for describing transmission of enhancement data with television content is the ATVEF specification, with one version described in ATVEF Specification, Draft Version 1.1r26, dated February 2, 1999. Enhancement data may be transmitted in a number of different ways from the transport operator system 14 to the receivers 16, depending on the type of transport medium 22. For example, with an analog transport medium such as the National Television System Committee (NTSC) Standard of the Electronics Industries Association, portions of the enhancement data may be sent in the vertical blanking interval (VBI) of the NTSC transmission. A description of NTSC may be found in Keith Jack, "Video Demystified: A Handbook For the Digital Engineer," HighText Publications (2d Ed. 1996). Other types of transport media (analog or digital) may provide different mechanisms of communicating the enhancement data.

Enhancement data according to the ATVEF Specification may include enhancements each having the following components: an ATVEF announcement, a resource, and a trigger. The three components may be transmitted using Internet Protocol (IP) multicast to the receivers. An IP multicast standard is described in Request for Comment (RFC) 1301, entitled "Multicast Transport Protocol." RFCs may be available at website address {<http://www.ietf.org/rfc.html>}.

Generally, an ATVEF announcement indicates that enhancement data is being transmitted, a resource includes one or more files that contain the enhancement data, and a trigger synchronizes the enhancement data with the TV transmission. An announcement may describe the location of both the resource stream and the trigger stream. For each television (TV) channel, one or more enhancements may be offered as choices presented to the user, who can select which of the enhancements, if any, to view. The ATVEF Specification may utilize a one-way transmission protocol (the Unidirectional Hypertext Transfer Protocol or UHTTP, described in the ATVEF Specification) to deliver resource data.

The announcements, resources, and triggers associated with an A/V channel may be delivered at about the same time as and with the transmission of the A/V content on

that channel. Conventionally, for each enhancement, the resource stream may be delivered along with the announcement, with the resource stream stored locally in the receiver 16. If a viewer so desires, the enhancement data can be retrieved at the receiver from local storage for viewing.

5 Conventionally, ATVEF announcements arrive at an expected location, such as a predetermined Internet Protocol (IP) address and port. The Internet protocol is described in RFC 791, entitled "Internet Protocol," dated September 1981. The locations of the resource and trigger streams specified in the ATVEF Specification may be described as IP addresses and ports where the resources and triggers may be found. The ATVEF
10 announcement may be a Session Description Protocol (SDP) announcement, as described in RFC 2327, entitled "SDP: Session Description Protocol," dated April 1998.

In current ATVEF systems, the enhancement data including announcements are delivered with the A/V content associated with each TV channel. However,
15 announcements for multiple TV channels are not grouped for arrival at the ATVEF announcement IP address and port in the receivers 16, as the one or more announcements of the currently tuned TV channel are received at the ATVEF announcement IP address and port along with the A/V content stream of the currently tuned TV channel. Thus, conventionally, when tuning from one TV channel to another, the receiver assumes that the source of the data network changes correspondingly, that is, only announcements for
20 the currently tuned TV channel flow on the announcement IP address and port. For example, when a receiver is tuned to channel B, the enhancement data of channel B is received at the announcement IP address and port but not enhancement data associated with other channels. According to the current ATVEF Specification, ATVEF announcements for channels other than the currently tuned channel cannot arrive in the
25 ATVEF announcement IP address and port. The enhancement data is thus tightly coupled to the A/V content associated with each TV channel so that the receiver can easily associate the enhancement data with the A/V content of the currently tuned TV channel in a conventional ATVEF system.

To provide for greater flexibility and/or to alleviate bandwidth concerns of the
30 transport medium 22, some embodiments of the invention transmit (using IP multicast) enhancement data associated with multiple A/V channels (e.g., TV channels) over a link

that is separate from the transport medium used to transmit A/V content (or, alternatively, that is part of the same delivery mechanism as the A/V content but is not associated with any A/V channel, e.g., an MPEG-2 transport stream with ancillary information in a data-only program separate from the A/V programs). The separate delivery mechanism to
5 deliver the A/V content may be a separate transport stream or a separate link 20 such as a general purpose data link or some other type of communications link. Thus, according to some embodiments, enhancement data is separated from the A/V data at the transport operator system 14 (or alternatively, at another source), with the A/V content transmitted over the transport medium 22 and the enhancement data transmitted over the secondary
10 link 20 (or a separate transport stream).

In the ensuing description, reference is made to receiving enhancement data received over the secondary link 20; however, it is contemplated that the enhancement data or other type of ancillary information may be received over a separate transport stream such as that used with MPEG-2 delivery systems. In addition, reference is made
15 to tuning to a specific A/V channel (e.g., TV channel) at the receiving end. It is contemplated, however, that the receiver system can be tuning instead to one of the A/V transport stream programs in an MPEG-2 based systems.

Thus, generally, tuning to an A/V program may include tuning to A/V channels (e.g., TV channels), to transport stream programs (e.g., in an MPEG based system), or to
20 other separations or segments of A/V content. Also, associating ancillary information with an A/V program can thus refer to associating ancillary information with an A/V channel, a transport stream program, or other A/V separations or segments.

In accordance with some embodiments, the enhancement data associated with multiple A/V channels may be grouped and stored in the transport operator system 14
25 and/or the one or more servers 18 and multiplexed into a transmission stream on the secondary link 20. Consequently, according to some embodiments, enhancement data associated with multiple A/V channels may be combined into a transmission stream on the secondary link 20. At the receiving end, the combined stream of enhancement data is separated and associated with a currently tuned A/V channel.

30 In accordance with some embodiments, indications (referred to as special announcements) may be transmitted over the secondary link 20 along with the

enhancement data to aid in the association of enhancement data with the tuned channel. In a conventional ATVEF system, such special announcements are not employed because enhancement data is tightly coupled with the A/V content. Upon receipt of the special announcements, each receiver 16 determines the A/V channel that the receiver is tuned to and identifies the special announcement associated with the tuned channel. The special announcement includes data identifying locations of one or more ATVEF announcements associated with that A/V channel. At the receiving end, instead of ATVEF announcements arriving at the expected location (e.g., predetermined IP address and port), the special announcements arrive at the expected location. Using information in a special announcement, each receiver 16 can then locate the one or more ATVEF announcements received over the secondary link 20 and associate them with the tuned channel. From the retrieved ATVEF announcements, locations of resource files and triggers can then be conventionally determined for retrieval and presentation. The resource files of the enhancement data can then be combined with the A/V content for presentation (audio or video presentation or both).

Thus, effectively, some embodiments of the invention separate A/V content and enhancement data at the source (e.g., the transport operator system 14). The A/V content is transmitted over the transport medium 22, while the enhancement data (along with special announcements) associated with multiple A/V channels are combined and multiplexed onto a separate transmission stream. At the receiving end (e.g., receivers 16), the combined enhancement data are separated (demultiplexed) and associated with a currently tuned A/V channel.

Referring to Fig. 1B, an alternative embodiment of an information delivery system 10A is illustrated. The system 10A includes a content creator 12 and a transport operator system 14 to transmit A/V content with enhancement data over the transport medium 22. Unlike the information delivery system 10 of Fig. 1A, the system 10A includes distribution systems 50 and 51, coupled to receive A/V content and enhancement data from the transport operator system 14. The distribution systems 50, 51 may include geographic regional centers, for example, adapted to receive enhanced TV content and to distribute the content locally in a predefined geographic region. Each distribution system 50 or 51 transmits A/V content and enhancement data to receivers 17

or 19, respectively. In addition, the receivers 17 or 19 are coupled by respective secondary link 21 or 23 (e.g., Internet, DOCIS link, or other type link) to respective distribution system 50 or 51.

In the embodiment of Fig. 1B, the distribution system 50 or 51 separates the A/V content from the enhancement data, with the A/V content sent over transport medium 52 or 53 and combined enhancement data associated with multiple A/V channels transmitted over data link 21 or 23. Alternatively, the enhancement data may be transmitted by one or more servers 25, 27 over the secondary links 21, 23.

Special announcements may also be sent by the distribution system 50 or 51 over the secondary link 21 or 23. As with receivers 16 in the Fig. 1A embodiment, the receivers 17 or 19 are able to demultiplex the combined enhancement data (sent along with the special announcements) to associate enhancement data with a tuned A/V channel.

Referring to Fig. 2, components in the transport operator system 14, receiving system (receiver 16, 17, or 19) and the server 18 in the system 10 of Fig. 1A are illustrated. With some modifications, the distribution system 50 and 51 may have similar components as the transport operator system 14. The transport operator system 14 may include a receiving port 102 to receive information from the content creator 12 over a link 24. The received enhancement data may be provided to a controller 106 in the transport operator system 14. A/V content may be received with the enhancement data through port 102 or through a separate A/V receive port (not shown). The controller 106 may be run under control of a software routine 108 (referred to as a transport routine). The transport routine 108 may initially be stored in a storage medium 104 and loaded by the controller 106 for execution. Instructions and data of the transport routine 108 may also be stored in the storage medium 104. According to some embodiments, the controller 106 may be adapted to separate the A/V content from the enhancement data before separate transmission of the A/V content over the transport medium 22. The controller 106 may also create special announcements to be transmitted with enhancement data over a separate link (e.g., link 20). The enhancement data and special announcements may be stored in a storage medium 113, which may be transmitted over the secondary link 20 through a transceiver 112. Alternatively, the enhancement data and

special announcements may be transmitted over the transport medium 22 with the A/V content but in a separate transport stream program. In the latter embodiment, different parts of the transport routine 108 (or alternatively, different routines) may handle transmission of both the A/V content and the enhancement data and special announcements. The transceiver 112 may be a telephone modem, a cable modem, or any other type of analog or digital transceiver or transmitter adapted to communicate over the secondary link 20.

Enhancement data may be stored in a storage medium 126 in the server 18 in addition to or instead of the enhancement data stored in the transport operator system 14. The server 18 further includes a transceiver 124 coupled to the secondary link 20 and a control device 128. More than one server 18 may be coupled to the secondary link 20 to store additional enhancement data. Alternatively, a plurality of servers 18 may be coupled to the receivers 16 over separate links.

In the receiving system (receiver 16, 17, or 19), a receiver circuit 114 (e.g., a TV tuner card) is adapted to receive content over the transport medium 22 and a transceiver 116 is adapted to communicate over the secondary link 20. The receiving circuit 114 may be associated with an A/V device driver routine 130 that forwards the received A/V content to application software adapted to process and present the A/V content in the receiving system. The transceiver 116 may be associated with a network device driver 132 to receive enhancement data from the link 20.

In one embodiment, the network device driver 132 may send received data to a TCP/IP (Transmission Control Protocol/Internet Protocol) stack 134. TCP is described in RFC 793, entitled "Transmission Control Protocol," dated September 1991. Data flows through the TCP/IP stack 134 to application software, including an enhancement routine 138 for receiving and processing enhancement data and a special announcement routine (SA routine) 136 to receive and process special announcements. In an alternative arrangement, the SA routine 136 may be part of the enhancement routine 138. The application routines, device drivers, and other routines or programs may be executable on a controller 120. Such routines or programs may be initially stored in a storage medium 118 and loaded by the controller 120 for execution. The SA routine 136 is capable of associating enhancement data received over the secondary link 20 to the currently tuned

A/V channel. The SA routine 136 may then combine the associated enhancement data with the A/V content of the currently tuned TV channel for presentation. Alternatively, the enhancement data and special announcements may arrive in a separate transport stream program (e.g., such as those in MPEG based systems) over the transport medium
5 22, in which case it may be different parts of the SA routine 136 (or different routines) that process receipt of the enhancement data and A/V content.

Referring to Fig. 6, a process according to one embodiment performed in the transport operator system 14 by the controller 106 (under control of the transport routine 108) is described. Enhancement data for different A/V channels are received (at 202) by
10 the controller 106. The enhancement data for the different TV channels, which may be in the form of IP datagrams, for example, may then be combined (at 204) and stored in the storage medium 113. Alternatively, the enhancement data may be communicated to the server 18 for storage and transmission over the link 20. Resources and triggers associated with the different TV channels are stored at their respective IP addresses. The
15 controller 106 detects presence of announcements when they appear at the ATVEF announcement address and port in the transport operator system 14. The announcements are separated out onto different IP addresses corresponding to the A/V channels, with one IP address assigned for the one or more ATVEF announcements associated with each A/V channel. Such announcements are not sent along with the A/V content on the
20 ATVEF announcement address and port, as conventionally done, but instead are stored at a different announcement IP address.

The controller 106 next resolves (at 206) any IP address conflicts that may occur among IP datagrams containing resource and trigger streams. If a clash in IP addresses exists for IP datagrams of the resource and trigger data for different TV channel sources,
25 the IP addresses of the datagrams may be changed to avoid collision. Conventional techniques exist to detect and resolve IP address conflicts. Alternatively, conventional techniques also exist for assigning IP multicast addresses (e.g., static owned address allocation) to avoid creating conflicting addresses.

The enhancement data, including announcements, resources, and triggers, are
30 transmitted (at 208) over the secondary link 20. A special announcement is also

transmitted (at 210) with the enhancement data to indicate that ATVEF announcements associated with the A/V channel is available from a different source.

Separation of the enhancement data and the A/V content is illustrated in Figs. 3A and 3B. As illustrated in Fig. 3A, each of multiple A/V channels A, B, and C includes audio data (A), video data (V), and enhancement data (D). The enhancement data of the multiple channels are separated from the A/V content, as illustrated in Fig. 3B, so that the A/V content is transmitted without an ATVEF announcement, resource, or trigger. The enhancement data (D) of the different TV channels are multiplexed onto a data network (e.g., the secondary link 20) for transmission to or for retrieval by the receivers 16.

Thus, according to some embodiments of the invention, the ATVEF announcements are not sent on the usual ATVEF announcement address and port. Instead, ATVEF announcements for a single A/V channel are made available on their own announcement IP address. Instead of the regular ATVEF announcements, a special announcement is transmitted on the ATVEF announcement address and port to indicate that the ATVEF announcements for the TV channel have been re-directed. In other embodiments in which ATVEF is not used, announcements may refer to other indications of presence of ancillary information.

According to the current ATVEF Specification, an ATVEF announcement sent on the ATVEF announcement address and port includes an attribute "a = type:tve" to identify that enhancement data is being sent. According to one embodiment of the invention, instead of including the attribute "a = type:tve," the special announcement includes a different identifier attribute, e.g., "a = type:x-tvemult" or other predetermined attribute. In one embodiment, the special announcement does not locate resource files and triggers for the enhanced TV program, but instead locates the announcement data for each TV channel. The special announcement is not recognized as a standard ATVEF announcement because of the lack of the "a = type:tve" attribute.

In one embodiment, the special announcement may include the following information: TV network name (if any), located in a first string, e.g., "a = x-tvnet:networknamestring"; TV station call letters, located in a second string, e.g., "a = x-tvstation:stationnamestring"; and/or major and minor channel numbers for tuning, located in a third string, e.g., "a = x-tvtune:majorchannelnumber:minorchannelnumber".

The information of the fields in the special announcement may be used to tie the special announcement to a particular TV channel through an electronic program guide or other channel mapping mechanism that may be made available to the receiving system.

Referring to Fig. 7, a process according to one embodiment performed by the controller 120 (under control of the SA routine 136 and/or enhancement routine 138 in each receiver 16, 17, or 19 is illustrated. On the receiving side, the controller 120 determines if one or more special announcements have been received (at 302) on the predetermined ATVEF SDP address and port. Using the strings listed above, the controller 120 processes the special announcements until one for the currently tuned A/V channel is found (at 304). It then uses the special announcement to find the IP address and port for the ATVEF announcements for the currently tuned channel (at 306). At this point, the ATVEF announcements that normally would have been transmitted over the transport medium 22 along with the A/V content for the tuned TV channel have been located. If the ATVEF announcement or announcements are found, then the identified ATVEF announcements are processed (at 310) to locate resource files and triggers. Otherwise, an error is indicated (at 312).

The processing performed by the controller 120 (at 310) may be performed in one of various ways. In one embodiment in which the SA routine 136 is part of the enhancement routine 138, the controller 120 in the receiver 16 may directly access the ATVEF announcements located at the indicated IP address, from which the resource and trigger files may be located.

In an alternative embodiment in which the SA routine 136 and enhancement routine 138 are separate, the SA routine 136 first processes received special announcements. Based on the currently tuned A/V channel, the SA routine 136 identifies the one or more announcements associated with the tuned channel and retransmits or redirects them onto the expected ATVEF IP address and port so that the enhancement routine 138 can properly process the ATVEF announcements. The enhancement routine 138 can then proceed to locate the resource and trigger stream based on the received ATVEF announcements. In this alternative embodiment, the enhancement routine 138 need not be modified—instead, the responsibility of processing special announcements is placed on the SA routine 136. An advantage of this alternative embodiment is that

existing receiving systems may be easily retrofitted with the SA routine 136 by simply loading the component 136 from storage media (such as floppy diskettes or CD or DVD media) or down-loading the component 136 from a data network (such as the Internet).

Referring to Figs. 4 and 5, special announcements NA for channels B1, B2, and B3, received by the receiving system contain pointers to IP addresses of the ATVEF announcements AAB1, AAB2, and AAB3 for channels B1, B2, and B3, respectively. Assuming that channel B2 is the one currently tuned, the controller 120 (under control of the SA routine 136) in the receiving system identifies the received special announcement NA for channel B2. From information in the special announcement NA, the controller 120 may locate the announcements AAB2 associated with channel B2 for retransmission to the ATVEF announcement address and port. Upon retransmission of the ATVEF announcements AAB2 to the expected IP address and port, resource and trigger files located by the announcements AAB2 may then be conventionally processed by the enhancement routine 138.

Thus, a system has been described in which enhancement data associated with multiple TV programs or channels may be sent as a group to one or more receivers. A predetermined indication (e.g., a special announcement) may be used to identify the location of ATVEF announcements for enhancement data of the tuned A/V channel. The ATVEF announcements may then be received and processed to obtain locations of resource and trigger files.

Some embodiments of the invention may include one or more of the following advantages. Enhancement data for multiple channels or programs may be carried over a general purpose data network separately from the A/V content transport medium. This provides greater flexibility in how the enhancement data may be transmitted. For example, if the transport medium for delivering the A/V content does not have sufficient bandwidth for sending large amounts of enhancement data, the separate channel may provide a mechanism of increasing that bandwidth. In cases where the A/V content is transmitted over an analog transport medium (such as an NTSC medium), delivering enhancement data over a separate channel such as a DOCSIS link, the Internet, or other communications link, avoids the expense of employing a VBI data decoder in each receiver. Additionally, the viewer may be able to watch the enhancement data portion of

the TV program separately from the A/V content if the viewer has a separate TV and personal computer.

Further embodiments of the invention may include transmission sources to transmit A/V content other than TV content. Ancillary information associated with such A/V content may be similarly made available over a separate link.

Various software or firmware (formed of modules, routines, or other layers, for example) may be stored or otherwise tangibly embodied in one or more machine-readable storage media in the information delivery system. Storage media suitable for tangibly embodying software and firmware instructions may include different forms of memory including semiconductor memory devices such as dynamic or static random access memories, erasable and programmable read-only memories (EPROMs), electrically erasable and programmable read-only memories (EEPROMs), and flash memories; magnetic disks such as fixed, floppy and removable disks; other magnetic media including tape; and optical media such as CD or DVD disks. The instructions stored in the one or more storage media when executed cause the information delivery system to perform programmed acts.

The software or firmware can be loaded into the information delivery system in one of many different ways. For example, instructions or other code segments stored on one or more storage media or transported through a network interface card, modem, or other interface mechanism may be loaded into the system and executed to perform programmed acts. In the loading or transport process, data signals that are embodied as carrier waves (transmitted over telephone lines, network lines, wireless links, cables and the like) may communicate the instructions or code segments to the information delivery system.

While the invention has been disclosed with respect to a limited number of embodiments, those skilled in the art will appreciate numerous modifications and variations therefrom. It is intended that the appended claims cover all such modifications and variations as fall within the true spirit and scope of the invention.

What is claimed is:

1 7. The method of claim 6, wherein receiving the announcements includes
2 receiving the announcements at an Internet Protocol address and port different from an
3 expected announcement Internet Protocol address and port.

1 8. A system capable of communicating audio/video content, comprising:
2 a receiver adapted to tune to an audio/video program over a transport
3 medium;
4 a device adapted to receive announcement data associated with the tuned
5 audio/video program directed to a first location and to receive a special announcement
6 directed to the second location, the special announcement indicating availability of the
7 announcement data associated with the tuned audio/video program; and
8 a controller adapted to redirect the announcement data to a second
9 location.

1 9. The system of claim 8, wherein the second location includes an address
2 and port for receiving announcements according to an Advanced Television
3 Enhancement Forum Specification.

1 10. A method of communicating audio/video programs, comprising:
2 receiving the audio/video programs over a transport medium;
3 receiving a plurality of ancillary information streams associated with a
4 plurality of audio/video programs over a separate delivery mechanism, announcements in
5 the ancillary information streams being expected at a first location;
6 receiving a predetermined indication at the first location;
7 tuning to one of the audio/video programs; and
8 identifying a location of the announcement of an ancillary information
9 stream associated with the tuned audio/video program based on the predetermined
10 indication.

1 11. A method of communicating audio/video content and enhancement data,
2 comprising:

transmitting the audio/video content over a transport medium;
multiplexing enhancement data including announcements associated with
multiple audio/video programs for transmission over a separate delivery mechanism; and
transmitting a predetermined indication over the separate delivery
mechanism to a first location at which the announcements in the enhancement data are
expected, the predetermined indication being associated with one of the audio/video
programs and identifying a location other than the first location of one or more
announcements associated with the one audio/video program.

12. The method of claim 11, further comprising multicasting the enhancement
data and predetermined indications to a plurality of receivers.

13. The method of claim 11, wherein the enhancement data is according to an
Advanced Television Enhancement Forum Specification.

14. The method of claim 13, wherein the first location includes an IP address
and port at which announcements are expected to arrive.

15. A system capable of receiving audio/video content over a transport
medium and ancillary information over a separate delivery mechanism, comprising:
a first device adapted to receive the audio/video content associated with a
plurality of audio/video programs over the transport medium;
a second device adapted to receive one or more special indicators and a
stream of ancillary information portions associated with a plurality of audio/video
programs over the separate delivery mechanism; and
a controller adapted to locate one or more ancillary information portions
associated with a tuned audio/video program based on information in a special indicator
identified with the tuned audio/video program,
wherein the ancillary information portions include announcements, and
the special indicators include data identifying locations of the one or more
announcements.

662250 "6657E60

1 16. The system of claim 15, wherein the ancillary information is according to
2 an Advanced Television Enhancement Forum Specification.

1 17. The system of claim 16, wherein the announcements are expected at an
2 announcement IP address and port.

1 18. The system of claim 15, wherein the first and second devices may include
2 different parts of a software routine.

1 19. A system for transmitting audio/video content and announcement
2 information portions, comprising:
3 a first unit adapted to transmit audio/video content over a transport
4 medium;
5 a controller adapted to combine announcement information portions
6 associated with a plurality of audio/video programs for transmission; and
7 a second unit adapted to transmit the combined announcement information
8 portions with a special indicator associated with an audio/video program, the special
9 indicator being transmitted to a first location at which the announcement information
10 portions are expected, the special indicator identifying locations of the announcement
11 information portions.

1 20. The system of claim 19, wherein the announcement information portions
2 include announcements according to an Advanced Television Enhancement Forum
3 Specification.

1 21. An article including one or more machine-readable storage media
2 containing instructions for communicating audio/video programs in a system, the
3 instructions when executed causing a device in the system to:
4 receive the audio/video programs, each audio/video program including at
5 least one of audio data and video data, over a transport medium from a source;

568250-052299

6 receive a stream of ancillary data portions including announcements
7 associated with a plurality of audio/video programs over a separate delivery mechanism;
8 tune to one of the audio/video programs;
9 receive a predetermined indicator associated with the tuned audio/video
10 program at a first location; and
11 identify a second location of one or more announcements associated with
12 the tuned audio/video program based on the predetermined indicator.

1 22. The article of claim 21, the one or more storage media containing
2 instructions that when executed cause the system to receive audio/video programs
3 including television content associated with a plurality of television channels.

1 23. The article of claim 21, the one or more storage media containing
2 instructions that when executed cause the system to receive ancillary data portions
3 including enhancement data according to an Advanced Television Enhancement Forum
4 Specification.

ABSTRACT OF THE DISCLOSURE

A method and apparatus of communicating audio/video programs (e.g., television content associated with a plurality of channels) includes receiving the audio/video programs over a transport medium. A stream of ancillary data portions associated with a plurality of audio/video programs (e.g., a plurality of television channels or transport stream programs) may be received over a separate delivery mechanism. The ancillary data may include announcements associated with enhancement data according to an Advanced Television Enhancement Forum Specification, for example. One of the audio/video programs is tuned to, with one or more ancillary data portions located and identified with the tuned audio/video program. A special announcement in the ancillary data portions delivered to an expected location is used to locate announcements for the tuned audio/video program.

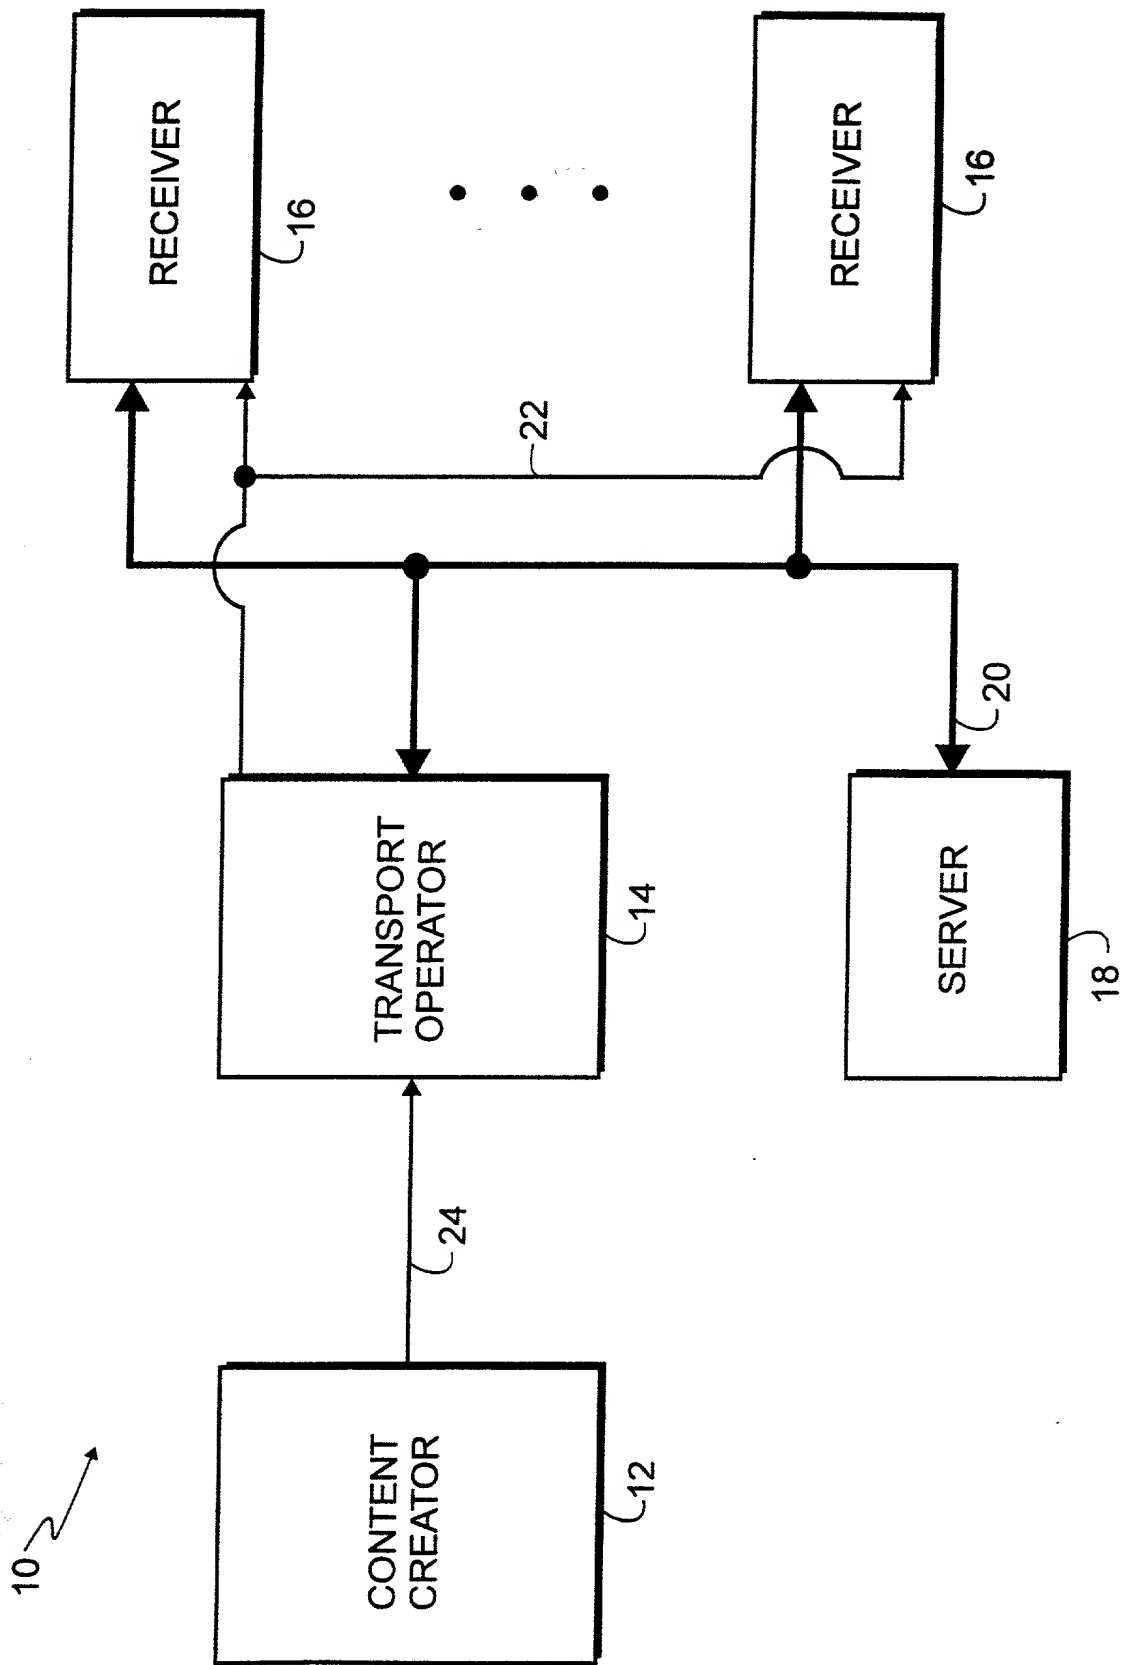


FIG. 1A

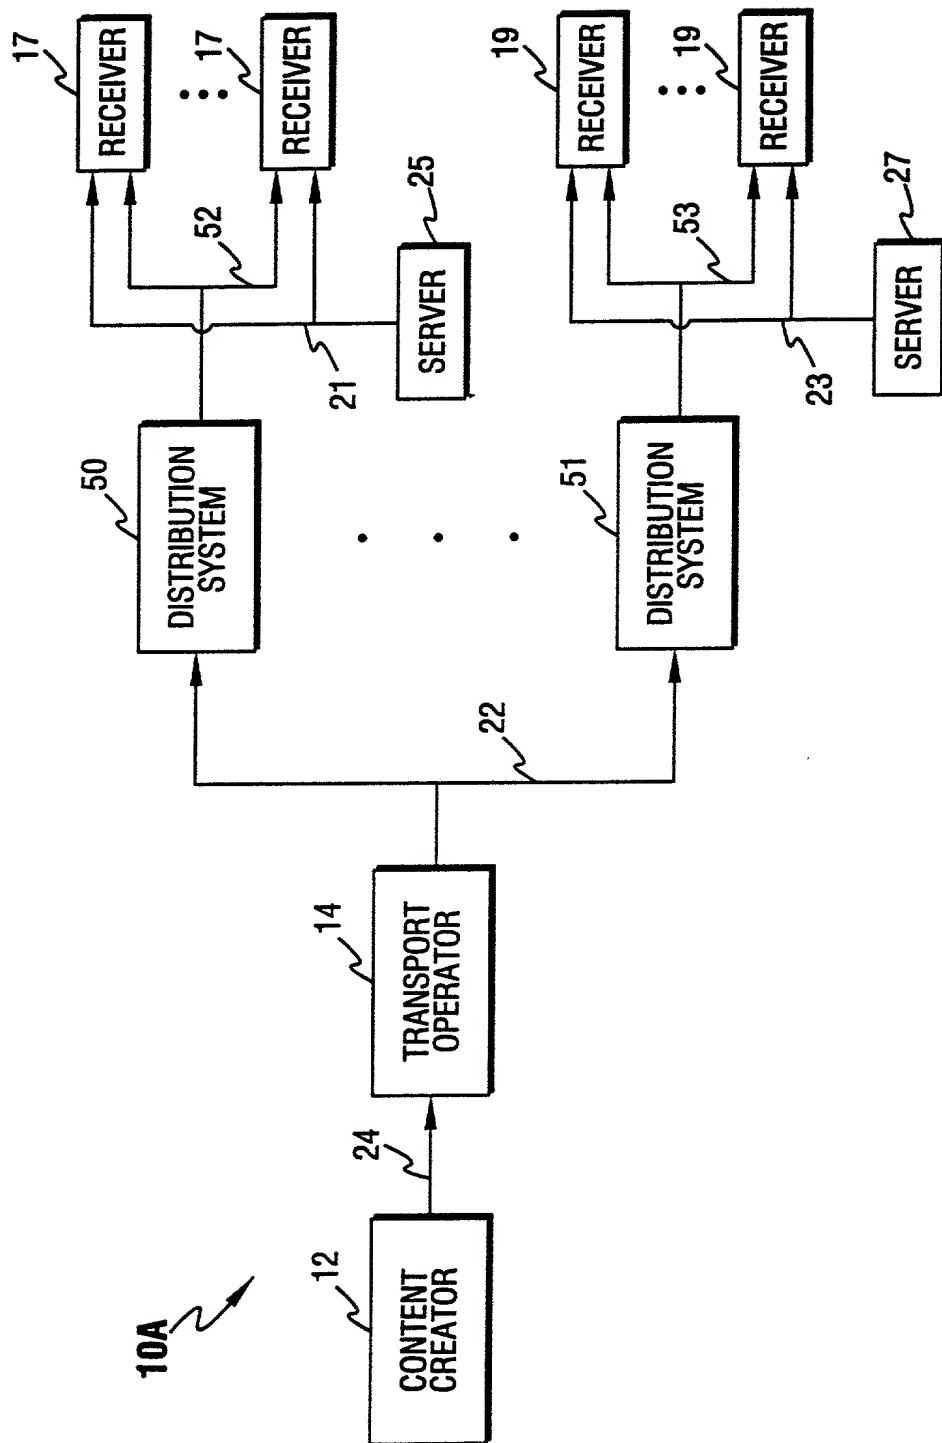


FIG. 1B

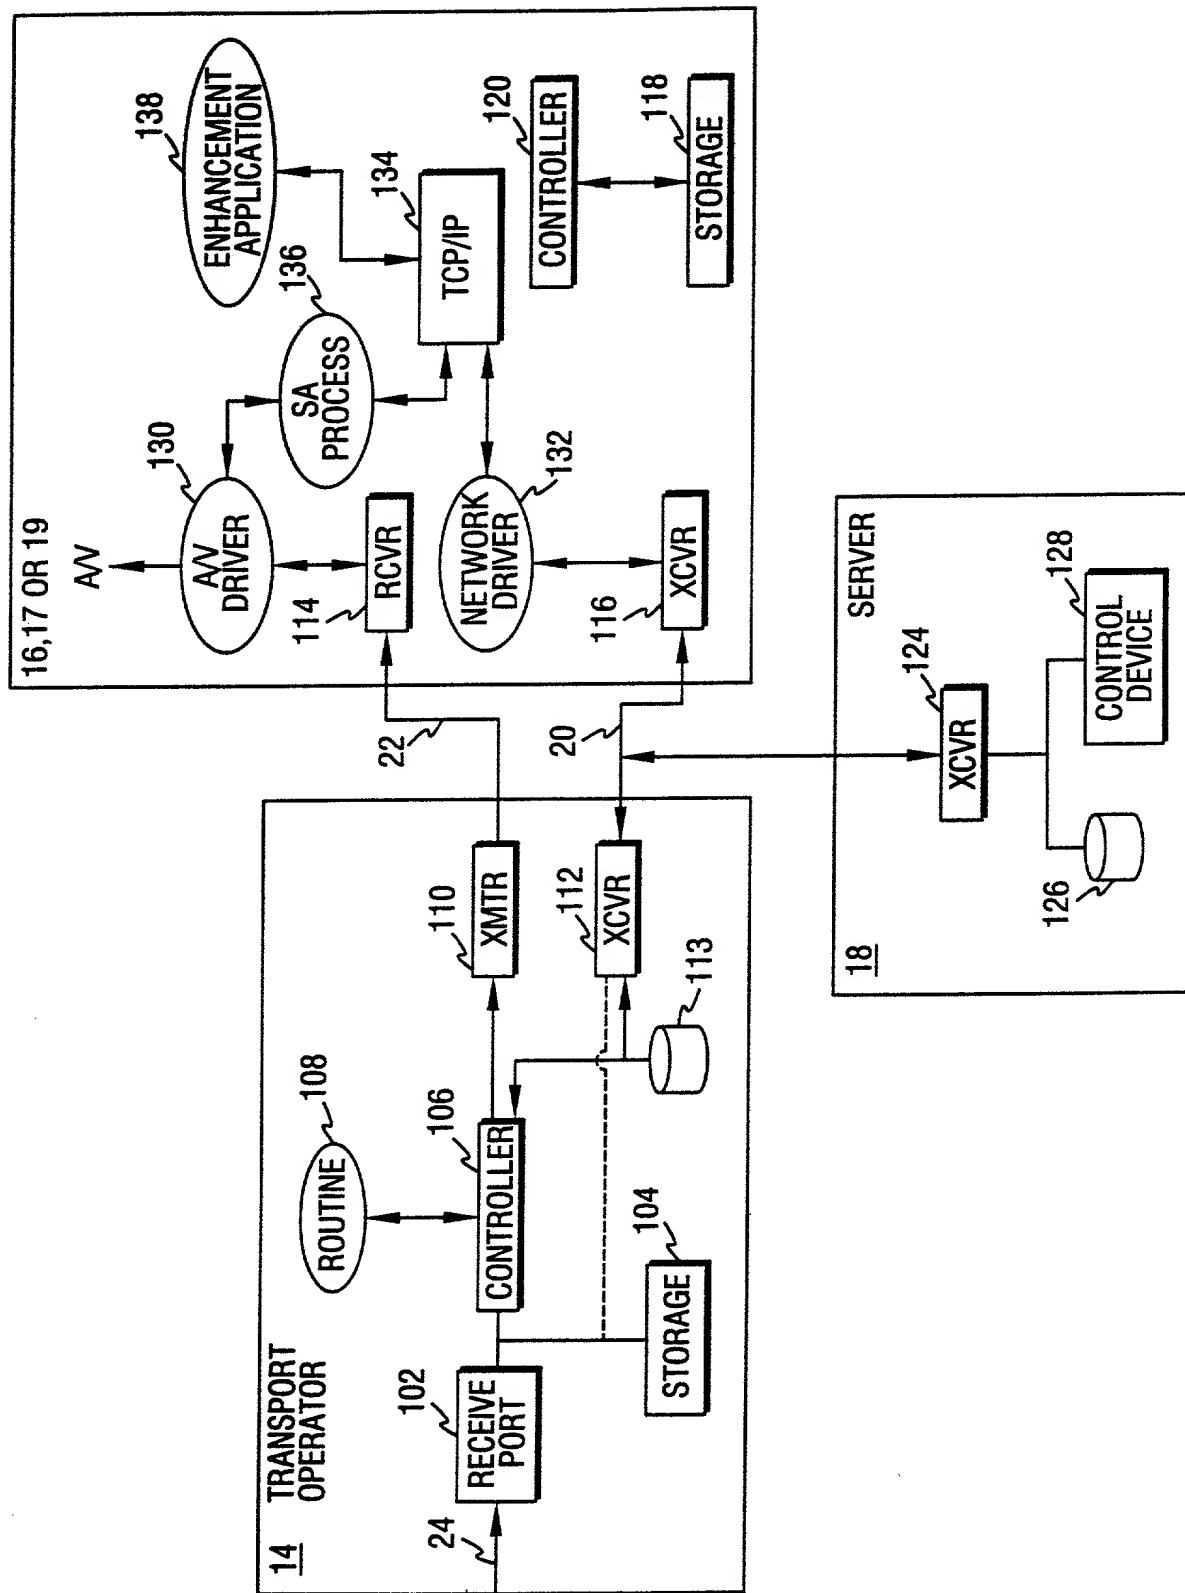


FIG. 2

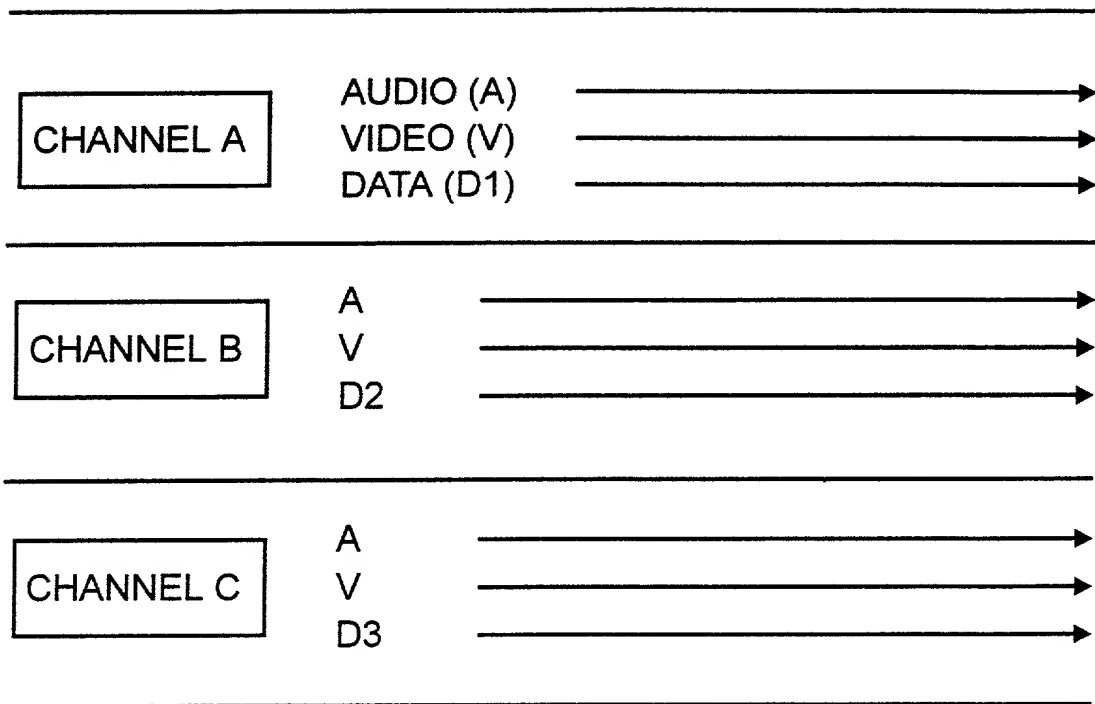


FIG. 3A

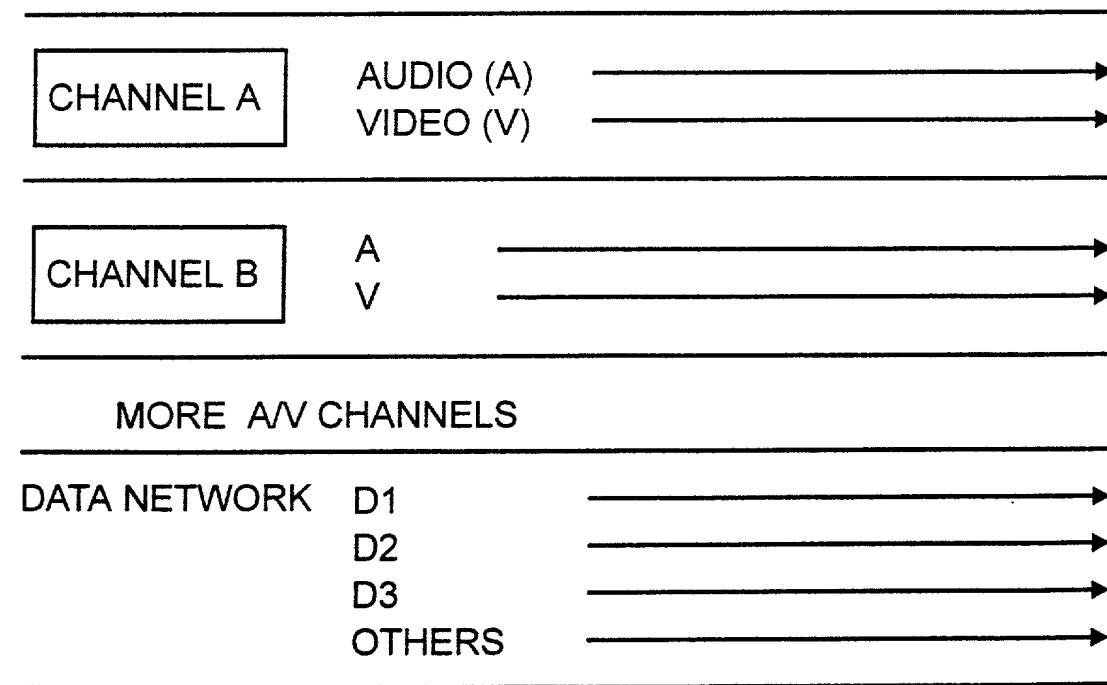


FIG. 3B

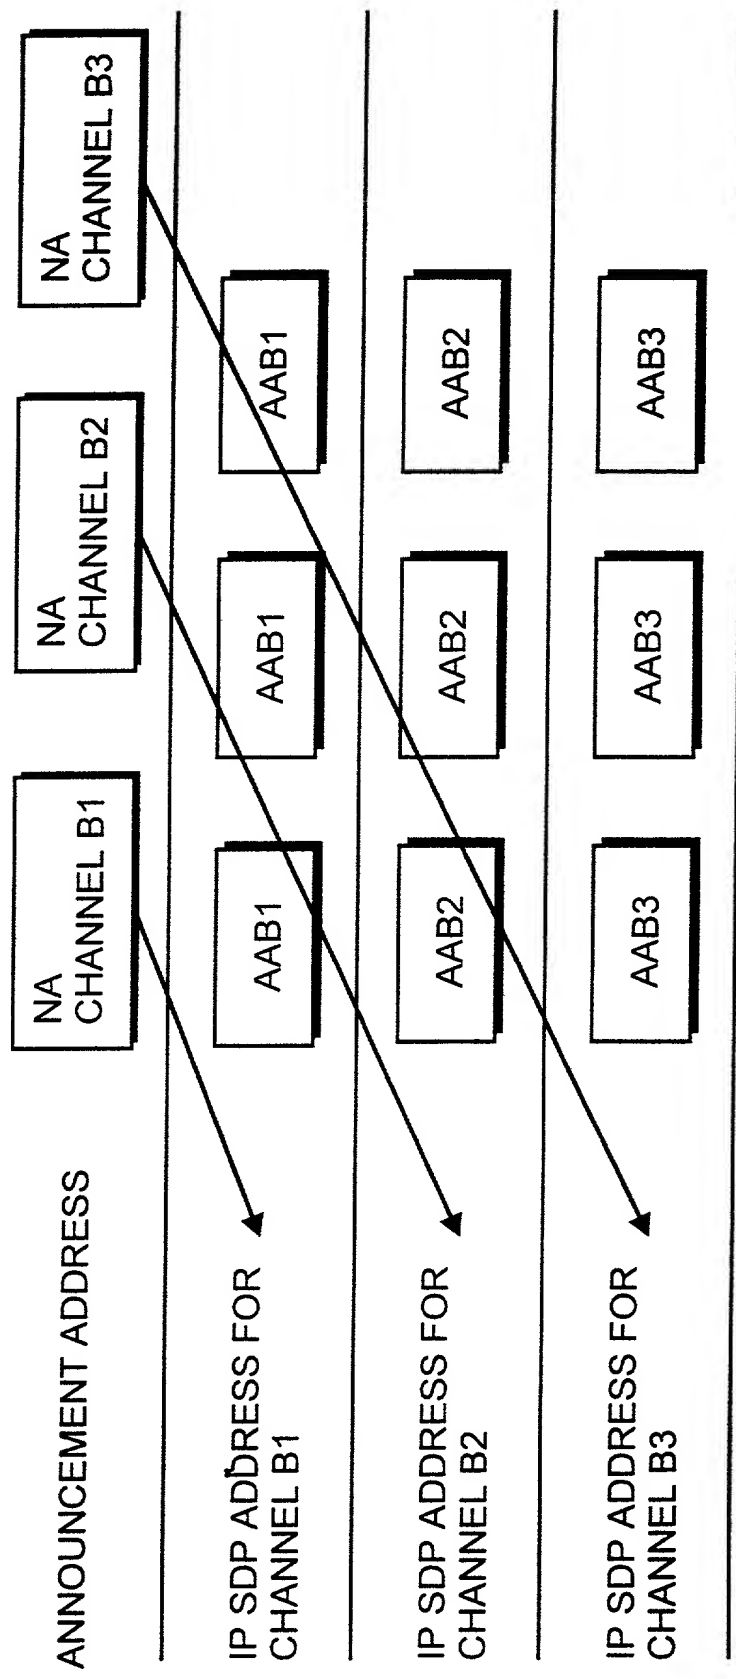


FIG. 4

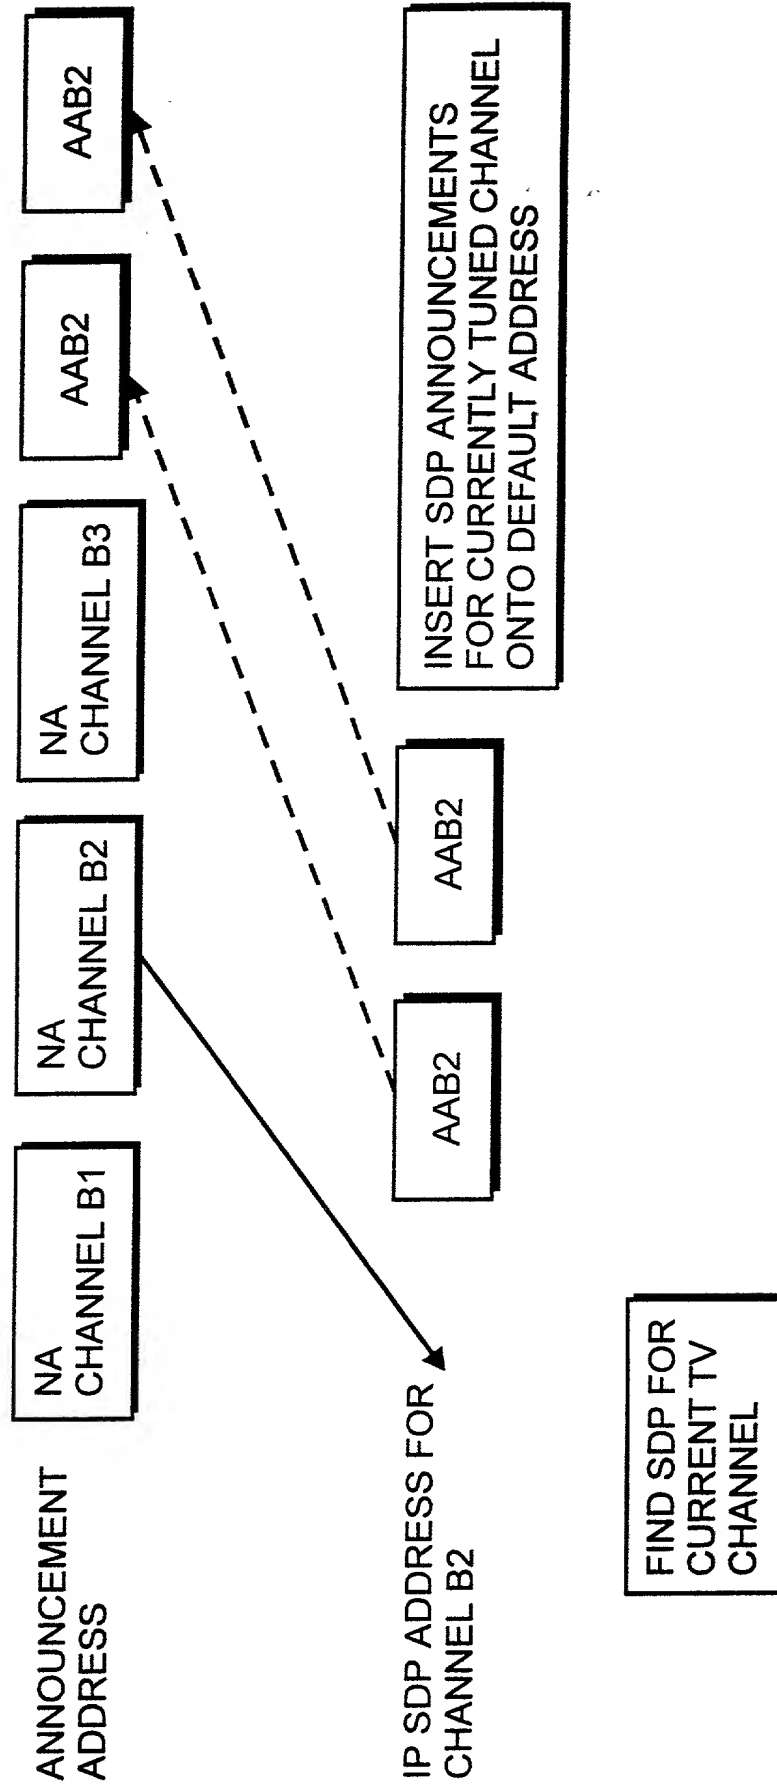


FIG. 5

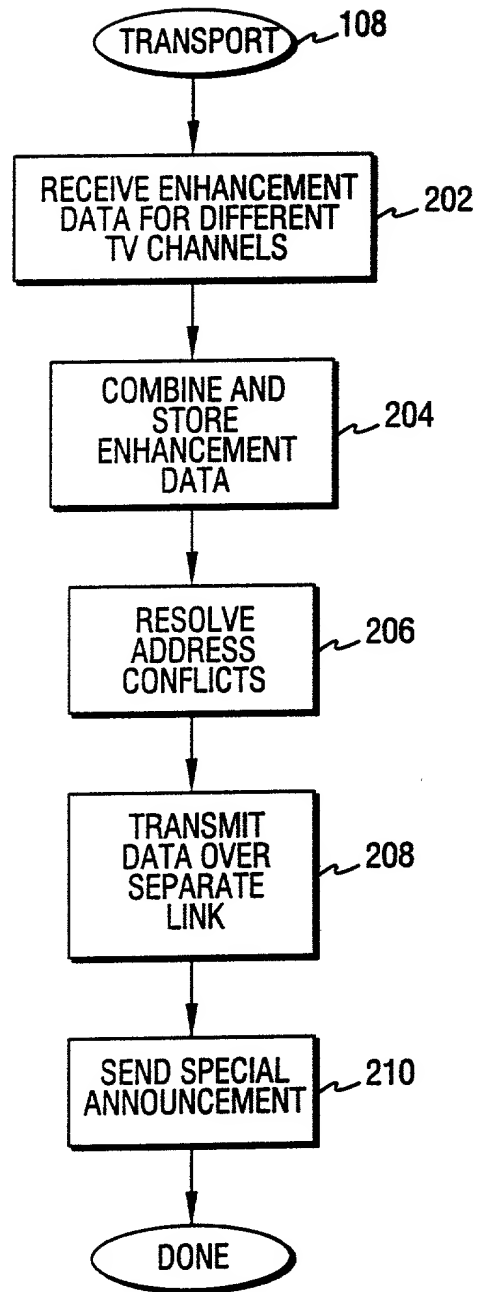


FIG. 6

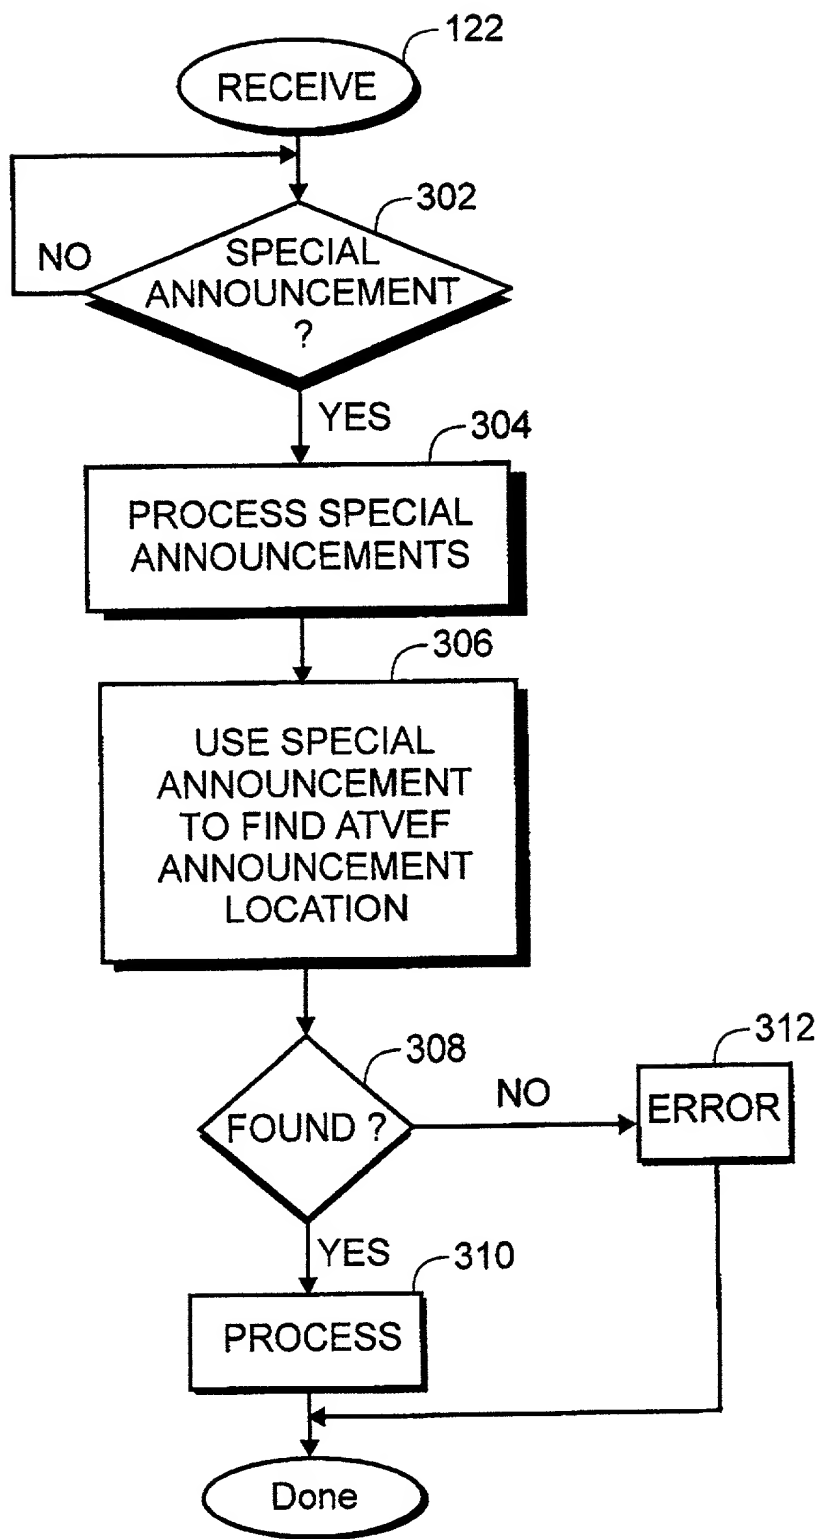


FIG. 7

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

COMMUNICATING ANCILLARY INFORMATION ASSOCIATED WITH A PLURALITY OF AUDIO/VIDEO CONTENT PORTIONS

the specification of which

X

is attached hereto.
 was filed on _____ As
 United States Application Number _____
 or PCT International Application Number _____
 and was amended on _____
 (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate Issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):			Priority Claimed	
Number	(Country)	(Day/Month/Year Filed)	Yes	No
Number	(Country)	(Day/Month/Year Filed)	Yes	No

I hereby claim the benefit under title 35, United States Code, Section 119(e) of the United States provisional application(s) listed below:

_____ (Application Number)	_____ (Filing Date)
_____ (Application Number)	_____ (Filing Date)


I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

_____ (Application Number)	_____ Filing Date	_____ (Status-patented, pending, abandoned)
_____ (Application Number)	_____ Filing Date	_____ (Status-patented, pending, abandoned)

I hereby appoint Timothy N. Trop, Reg. No. 28,994; Fred G. Pruner, Jr., Reg. No. 40,779, Dan C. Hu, Reg. No. 40,025; Coe F. Miles, Reg. No. 38,559, and John R. Merklings, Reg. No. 31,716 my patent attorneys, of TROP, PRUNER, HU & MILES, P.C., with offices located at 8554 Katy Freeway, Ste. 100, Houston, TX 77024, telephone (713) 468-8880, and Joseph R. Bond, Reg. No. 36,458; Richard C. Calderwood, Reg. No. 35,468; Sean Fitzgerald, Reg. No. 32,027; David J. Kaplan, Reg. No. 41,105; Leo V. Novakoski, Reg. No. 37,198; Naomi Obinata, Reg. No. 39,320; Thomas C. Reynolds, Reg. No. 32,488; Steven P. Skabrat, Reg. No. 36,279; Howard A. Skaist, Reg. No. 36,008; Steven C. Stewart, Reg. No. 33,555; Raymond J. Werner, Reg. No. 34,752; and Charles K. Young, Reg. No. 39,425; my patent attorneys, of INTEL CORPORATION; with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Send correspondence to Timothy N. Trop, TROP, PRUNER, HU & MILES, P.C., 8554 Katy Freeway, Ste. 100, Houston, TX 77024 and direct telephone calls to Dan C. Hu, (713) 468-8880.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: Wayne J. Carr	
Inventor's Signature: 	Date: 5/28/99
Residence: 6275 SW Tillamook Place, Beaverton, OR 97007-7836	Citizenship: US
Post Office Address: 6275 SW Tillamook Place, Beaverton, OR 97007-7836	

05324939 0523499